



5P5240

F/F reducing coupling.



NEW

Technical specifications

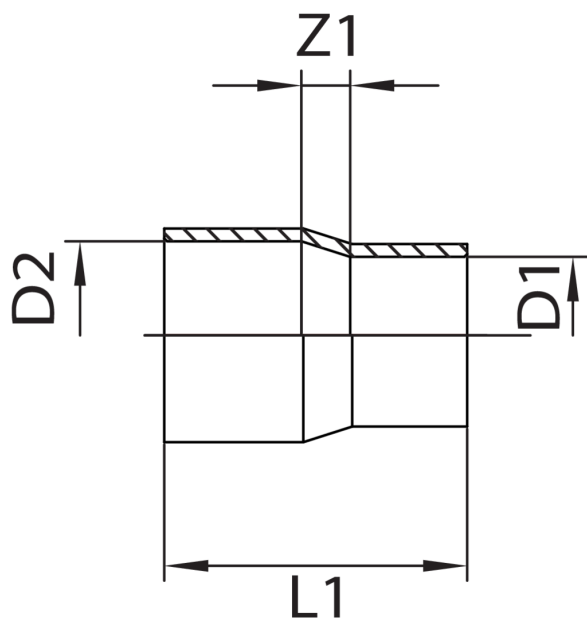

D1 X D2	BAG	MASTER BOX	CODE	L1	Z1
1/2" x 3/8"	10	450	5P5240A12A38000	25,5	7,5
5/8" x 1/2"	5	350	5P5240A58A12000	28,5	7,5
3/4" x 5/8"	5	300	5P5240A34A58000	31	5
7/8" x 3/4"	5	250	5P5240A78A34000	36	6,5
1"1/8 x 1/2"	5	100	5P5240B18A12000	39,5	12,5
1"1/8 x 7/8"	5	100	5P5240B18A78000	39	6
1"3/8 x 1/2"	5	50	5P5240B38A12000	50,5	19
1"3/8 x 5/8"	5	50	5P5240B38A58000	50	16,5
1"3/8 x 3/4"	5	50	5P5240B38A34000	50,5	14,5
1"3/8 x 7/8"	5	50	5P5240B38A78000	51	12,5
1"3/8 x 1"1/8	5	50	5P5240B38B18000	46	7,5
1"5/8 x 3/4"	1	25	5P5240B58A34000	58	22
1"5/8 x 7/8"	1	25	5P5240B58A78000	58	19,5
1"5/8 x 1"1/8	1	10	5P5240B58B18000	58	14
1"5/8 x 1"3/8	1	25	5P5240B58B38000	52,5	8,5
2"1/8 x 1"5/8	1	20	5P5240C18B58000	65	14,5

Applications



HVAC



REFRIGERATED
TRANSPORT



COMMERCIAL
REFRIGERATION



INDUSTRIAL
REFRIGERATION