



5P5130

Raccordo a T femmina.

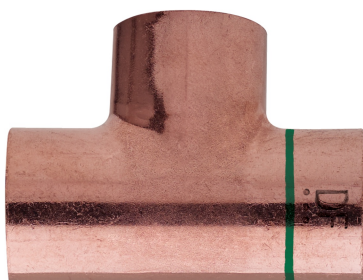

NEW

Specifiche tecniche

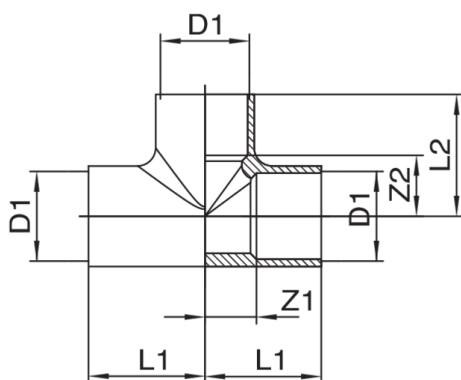

D1	BAG	MASTER BOX	CODICE	L1	Z1	L2	Z2
3/8"	10	450	5P5130A38A38A38	16	5	16	6,5
1/2"	10	400	5P5130A12A12A12	20,5	8	21	11
5/8"	5	250	5P5130A58A58A58	24,5	13,5	22,5	11,5
3/4"	5	250	5P5130A34A34A34	26	11,5	27	13,5
7/8"	5	150	5P5130A78A78A78	32	14,5	31,5	15
1"1/8	5	50	5P5130B18B18B18	36	19,5	36	19,5
1"3/8	5	30	5P5130B38B38B38	45	23	45	23
1"5/8	1	20	5P5130B58B58B58	48	26	48	26
2"1/8	1	12	5P5130C18C18C18	62,5	34,5	63,5	36,5

Applicazioni



HVAC



REFRIGERATED
TRANSPORT



COMMERCIAL
REFRIGERATION



INDUSTRIAL
REFRIGERATION