



B5358G



Raccordo dritto con girello in ottone, filetto femmina.

Specifiche tecniche

Disegno

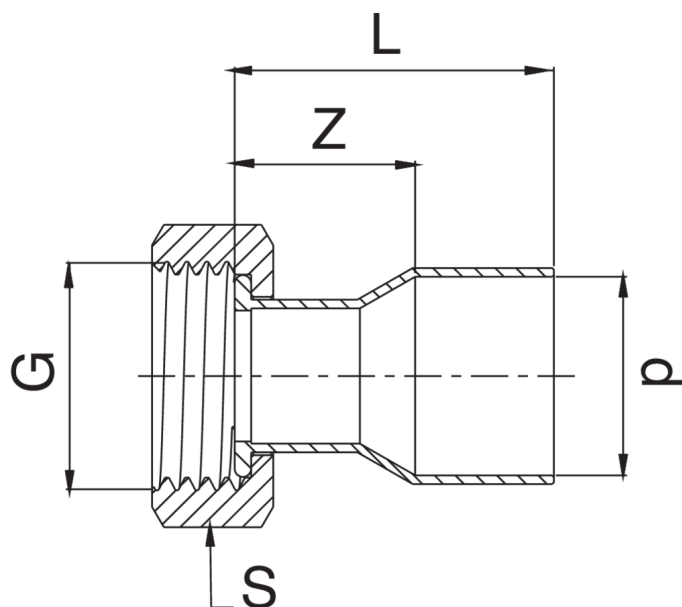

Tabella

G X D	BAG	MASTER BOX	CODICE	L MIN	S	Z
1/2" x 10	10	250	B5358GA12010000	21	24	13
1/2" x 12	10	250	B5358GA12012000	25	24	16
1/2" x 14	10	250	B5358GA12014000	25	24	14
1/2" x 15	10	250	B5358GA12015000	25	24	14
1/2" x 16	10	200	B5358GA12016000	25	24	14
3/4" x 12	10	200	B5358GA34012000	25	30	16

G X D	BAG	MASTER BOX	CODICE	L MIN	S	Z
3/4" x 14	10	200	B5358GA34014000	26	30	15
3/4" x 15	10	200	B5358GA34015000	27	30	16
3/4" x 16	10	200	B5358GA34016000	27	30	16
3/4" x 18	10	150	B5358GA34018000	28	30	15
3/4" x 20	10	150	B5358GA34020000	34	30	19
3/4" x 22	10	150	B5358GA34022000	34	30	19
3/8" x 12	10	150	B5358GA38012000	22	21	13
1" x 18	10	100	B5358GB01018000	31	37	18
1" x 22	10	100	B5358GB01022000	35	37	20
1"1/4 x 28	10	50	B5358GB14028000	39	46	21
2" x 54	1	16	B5358GC02054000	67	64	35

Applicazioni



DRINKING
WATER



HEATING



HVAC



GAS



COMPRESSED
AIR



SOLAR



INDUSTRIAL