




Raccordo a T femmina filettato femmina.



Specifiche tecniche

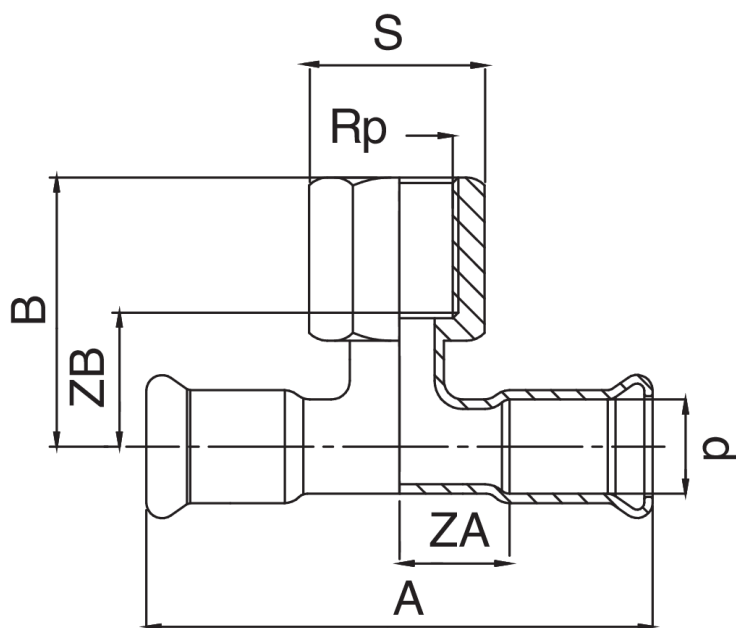

| D X RP | BAG | MASTER BOX | CODICE | A | B | S | ZA | ZB |
|-------------|-----|------------|-----------------|-------|------|----|-------|------|
| 76,1 x 3/4" | 1 | 8 | AXF130076A34076 | 172,5 | 71,5 | 30 | 32,25 | 55,2 |
| 76,1 x 2" | 1 | 4 | AXF130076C02076 | 232 | 83 | 65 | 62 | 57,3 |
| 88,9 x 3/4" | 1 | 5 | AXF130089A34089 | 200 | 78 | 30 | 39 | 61,7 |
| 88,9 x 2" | 1 | 5 | AXF130089C02089 | 243 | 89,5 | 65 | 60,5 | 63,8 |
| 108 x 3/4" | 1 | 3 | AXF130108A34108 | 216 | 89,5 | 30 | 32 | 73,2 |
| 108 x 2" | 1 | 3 | AXF130108C02108 | 310 | 101 | 65 | 79 | 75,3 |

Applicazioni



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



FIREFIGHTING



MARINE



STEAM



SOLAR



INDUSTRIAL